

SRM Tedarikçi Portal'ının Güncel Chrome Tarayıcıda Çalışabilmesi İçin Yapılması Gereken Ayarlar


1. Chrome tarayıcısını açıp adres çubuğuna aşağıdaki adres yazılır ve Enter tuşuna basılır.

chrome://flags/origin-aagent-cluster-default

2. Açılan sayfadan ekran görüntüsündeki gibi aşağıdaki iki seçenek **Disabled** durumuna getirilir ve sağ altta çıkan Yeniden başlat düğmesine tıklanır.

Temporarily unexpire M129 flags.d

Temporarily unexpire M130 flags.

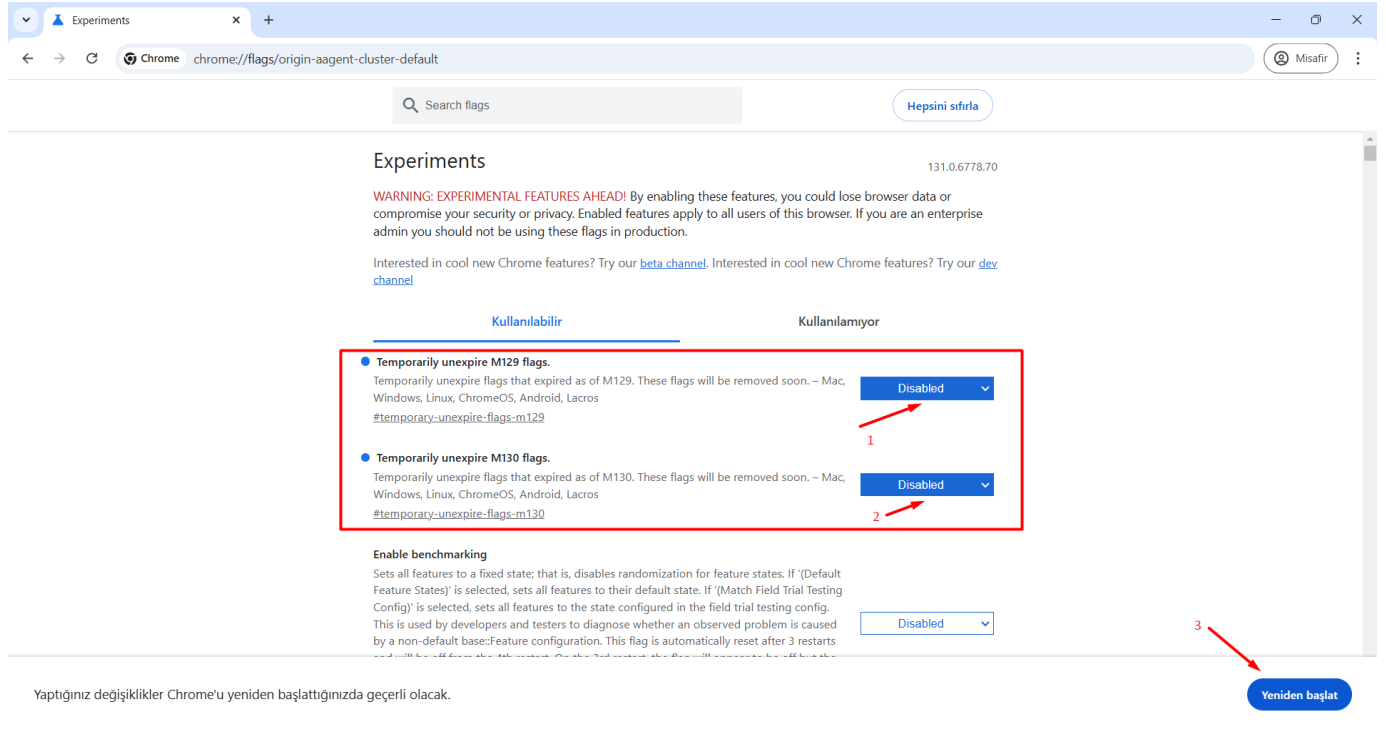

The screenshot shows the Chrome Experiments page at the URL chrome://flags/origin-aagent-cluster-default. The page is titled "Experiments" and includes a warning: "WARNING: EXPERIMENTAL FEATURES AHEAD! By enabling these features, you could lose browser data or compromise your security or privacy. Enabled features apply to all users of this browser. If you are an enterprise admin you should not be using these flags in production." Below the warning, there are two tabs: "Kullanılabilir" (Active) and "Kullanılmıyor" (Disabled). The "Kullanılmıyor" tab is selected. Two flags are listed under this tab, both set to "Disabled":


- Temporarily unexpire M129 flags.** Temporarily unexpire flags that expired as of M129. These flags will be removed soon. – Mac, Windows, Linux, ChromeOS, Android, Lacros. #temporary-unexpire-flags-m129. A red arrow labeled "1" points to the "Disabled" dropdown menu.
- Temporarily unexpire M130 flags.** Temporarily unexpire flags that expired as of M130. These flags will be removed soon. – Mac, Windows, Linux, ChromeOS, Android, Lacros. #temporary-unexpire-flags-m130. A red arrow labeled "2" points to the "Disabled" dropdown menu.

Below these flags, there is another flag: "Enable benchmarking" with a "Disabled" dropdown menu. A red arrow labeled "3" points to the "Yeniden başlat" (Restart) button at the bottom right of the page.

Yaptığınız değişiklikler Chrome'u yeniden başlattığınızda geçerli olacaktır.

3. Tarayıcı yeniden açıldığında `chrome://flags/origin-agent-cluster-default` adresini tekrar açıp Origin-keyed Agent Clusters by default seçeneği de **Disabled** olarak seçilir.

4. Tarayıcı yeniden başlatılır.

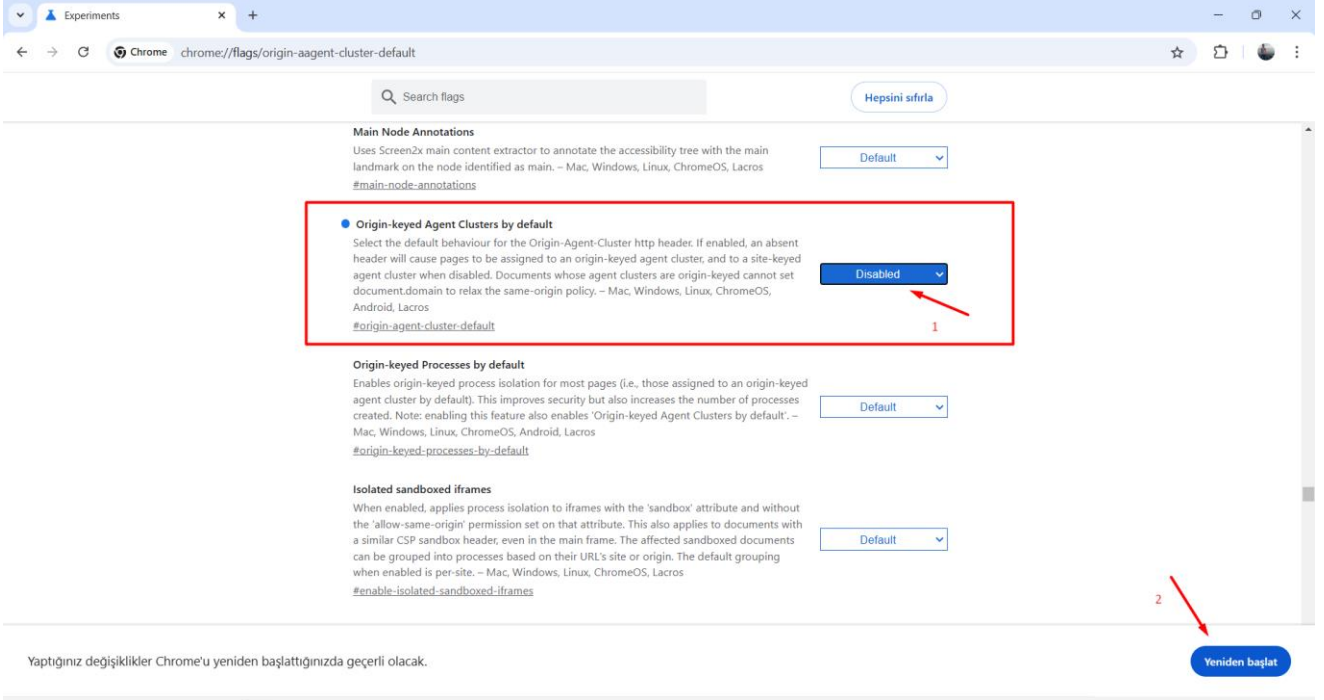

The screenshot shows the Chrome Experiments page for the flag `origin-agent-cluster-default`. The flag is currently set to **Disabled**, which is highlighted with a red box and a red arrow labeled '1'. Below the flag, there is a 'Yeniden başlat' (Restart) button, which is also highlighted with a red arrow labeled '2'. The page includes a search bar, a 'Hepsini sıfırla' (Reset all) button, and a footer with the text 'Yaptığınız değişiklikler Chrome'u yeniden başlattığınızda geçerli olacak.'

Search flags Hepsini sıfırla

Main Node Annotations
Uses Screen2x main content extractor to annotate the accessibility tree with the main landmark on the node identified as main. – Mac, Windows, Linux, ChromeOS, Lacros
#main-node-annotations Default

Origin-keyed Agent Clusters by default
Select the default behaviour for the Origin-Agent-Cluster http header. If enabled, an absent header will cause pages to be assigned to an origin-keyed agent cluster, and to a site-keyed agent cluster when disabled. Documents whose agent clusters are origin-keyed cannot set document.domain to relax the same-origin policy. – Mac, Windows, Linux, ChromeOS, Android, Lacros
#origin-agent-cluster-default Disabled 1

Origin-keyed Processes by default
Enables origin-keyed process isolation for most pages (i.e., those assigned to an origin-keyed agent cluster by default). This improves security but also increases the number of processes created. Note: enabling this feature also enables 'Origin-keyed Agent Clusters by default'. – Mac, Windows, Linux, ChromeOS, Android, Lacros
#origin-keyed-processes-by-default Default

Isolated sandboxed iframes
When enabled, applies process isolation to iframes with the 'sandbox' attribute and without the 'allow-same-origin' permission set on that attribute. This also applies to documents with a similar CSP sandbox header, even in the main frame. The affected sandboxed documents can be grouped into processes based on their URL's site or origin. The default grouping when enabled is per-site. – Mac, Windows, Linux, ChromeOS, Lacros
#enable-isolated-sandboxed-iframes Default

Yaptığınız değişiklikler Chrome'u yeniden başlattığınızda geçerli olacak.

Yeniden başlat 2